



PNEUMATIC ROCKDRILLS


DIAMOND DRILLS

REPLACEMENT PARTS


# PARTS HEADQUARTERS INC.

1175 Appleby Line, Unit C2, Burlington, Ontario, Canada L7L 5H8 Phone 905-332-3271 Fax 905-332-8497 Email info@partshq.com

## PHQ F61 Large Capacity Lubricator

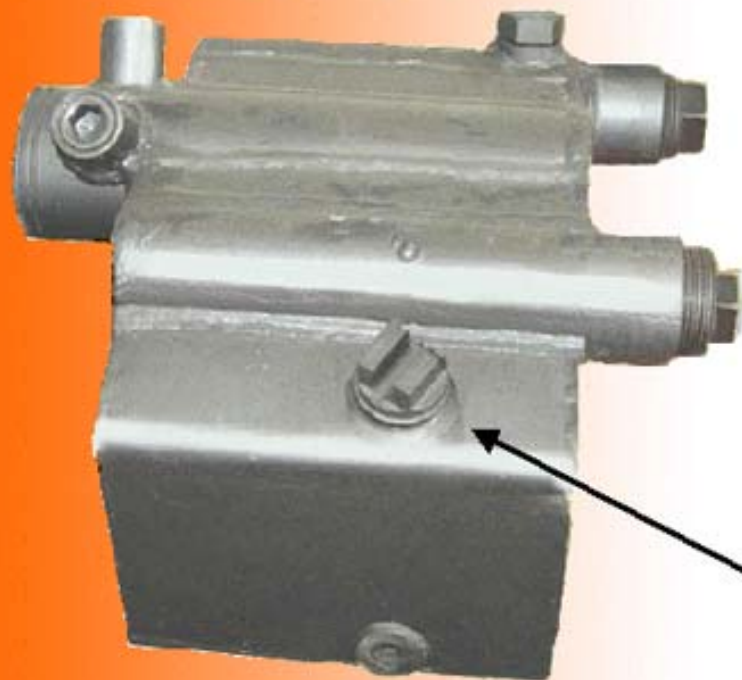

2 1/2" OVERALL DIAMETER WITH 1 1/2" SQUARE THREADS  
CAP MUST BE FULLY THREADED ALL THE WAY OUT TO OPEN



HOLE DRILLED FROM INSIDE OF FILLER CAP  
TO JUST BELOW "O" RING PROVIDES SAFETY  
AIR FRY IF LUBRICATOR IS PRESSURIZED



## PHQ F61 Lubricator

*Featuring PHQ's wide opening safety filler cap. The cap that allows quick and easy filling with lubricant.*

*The Safety cap feature warns the operator with the hiss of escaping air should the lubricator be pressurized.*



ISO 9001:2000

Certificate: 002485  
SIC 5082

[www.partshq.com](http://www.partshq.com)

# PHQ F61 Lubricator

## Features

Large mouth safety filler cap for ease of filling with rock drill grease or oil.

Lubrication flow is easily adjusted with the turn of a screw driver.

Available with screw in extension filler ports for mounting within the frame of a long-hole drill carrier.

## PHQ F61 Lubricator Specifications

### CAPACITY

1.5 gallons (6.8 liter)

### LENGTH

11.75 inches (300mm)

### WIDTH

12.25 inches (262mm)

### HEIGHT

10.35 inches (262mm)

### NOZZLE EXTENSION LENGTH

5.25 inches (134mm)

### WEIGHT OF LUBRICATOR (Empty)

44 pounds (20kg)



### AIR CONNECTION      HOSE SIZE

1 1/2 inch bsp      1 1/2 inch - 38mm

### SUITABLE FOR DRIFTER DRILLS

PHQ36-IR    S36-IR    PR123    BBC120

THE PHQ F61 lubricator is constructed from welded steel plate and the vessel has been pressure tested to an excess of 500 psi

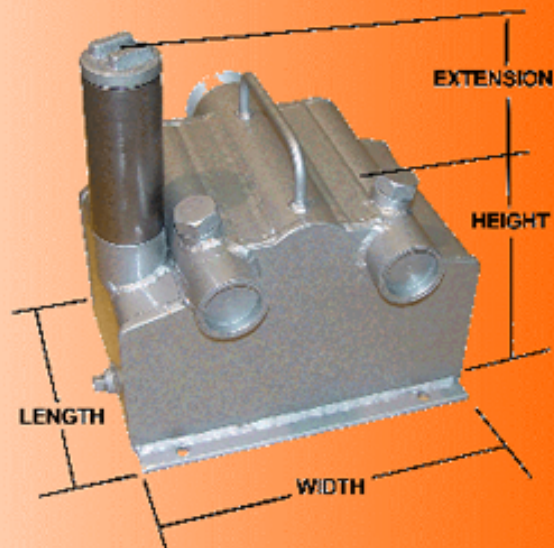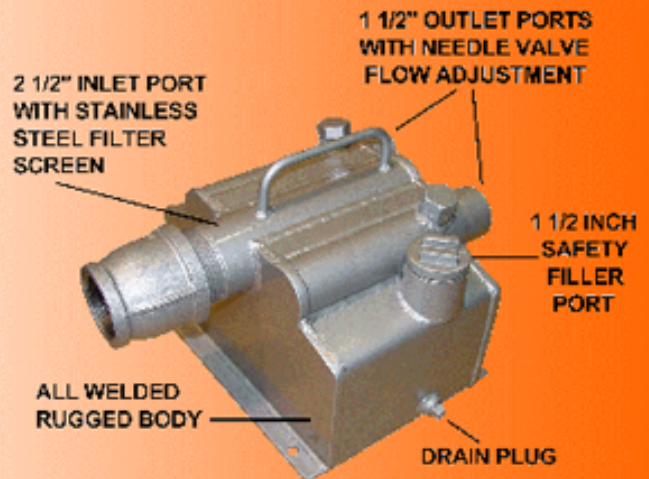

**PHQ carries a full range of parts for the PHQ-F61 Lubricator in stock.**

**Parts made in Canada to precise specifications using only the highest quality tool steel**

[www.partshq.com](http://www.partshq.com)

2005 Parts Headquarters Inc. All Rights Reserved. Terms of use.

PB010.04.2005